

CCV / CC

Capacitor Voltage Transformers-Coupling Capacitors
72.5 to 1200 kV

The CCV-type capacitor voltage transformer enables the accurate measurement of high voltages and the transmission of carrier currents ranging from 30 to 500 kHz. It acts simultaneously as a potential transformer and as a coupling capacitor. The CCV-type capacitor voltage transformer is designed to support line traps.

CC-type coupling capacitors are used together with inductive potential transformers.

- Line protection
- HF transmission
- Compliance with IEC, ANSI / IEEE or equivalent standards
- Reduce the slope of the Rate of Rise of Recovery Voltage (RRRV)
- Performance :
 - 72.5 to 1200 kV
 - Cn from 20000 to 2500 pF
 - Thermal capacity up to 1000 VA



Accurate measurement of high voltage

Alstom Grid has been manufacturing thousands of high voltage instrument transformers since 1919. This experience has been applied to the design and manufacture of our CCV Capacitor Voltage Transformers.

Our factories - each with its own well-equipped high voltage test laboratory-design and build equipment for numerous worldwide transmission and distribution networks.

Decades of experience have resulted in a lightweight, strong and reliable unit, able to meet the highest standards. These units are manufactured using the most modern insulation impregnation technology and equipment.



Thousands of installed units attest to their reliability

Customer Benefits

- Superior transient response
- Compact design
- High reliability and longevity due to optimized design
- Operation as coupling capacitors for power line carrier transmission
- Built-in safety features
- Hermetically sealed for long life
- Mineral & synthetic oil-filled. PCB free
- Non-corrosive hardware



Reliable design for high life expectancy

The high voltage capacitor and intermediate capacitor consist of series-connected capacitor elements. Each element is made of high purity cellulose paper, polypropylene and aluminium sheets forming electrodes. These elements are assembled to form a unit within the porcelain insulator.

Each unit is temperature and vacuum dried, then impregnated with high-grade dried and degassed dielectric oil.

The oil seal is ensured by synthetic rubber gaskets, which are unaffected by oil or ambient pollution. A stainless steel device allows expansion of the oil inside the insulator, maintaining constant pressure over the range of specified temperatures.

The electromagnetic unit, which includes the MV transformer and series inductance, is located in a hermetically sealed, oil-filled tank and is equipped with a protective device thus avoiding overvoltages and ferroresonance.

The low voltage terminal box is mounted on the tank.

Optional accessories such as HF equipment for carrier currents (voltage limiter, grounding switch and drain coil) are also located in the terminal box.

Insulator

The capacitive voltage transformer is composed of one or several capacitive units depending on the voltage level. The bottom insulator is fastened to the tank by means of a metal flange, which is bonded to the porcelain. This type of mounting gives very high mechanical resistance to withstand severe seismic stresses.

The standard design creepage is 25 mm/kV but can be more upon request.

The coupling capacitor is composed of one or several capacitive columns on a base without a tank.

Ceramic insulator and non-corrosive hardware ensure a weather-proof and environmentally resistant product, ideal for location in polluted or coastal areas.

External metallic parts

External metallic parts (tank, base, head, and flanges) do not require maintenance. The CCV tank and the CC base are zinc-coated steel (sprayed), then painted.

This metal protection technique complies with the most exacting standards (surface damages lower than the RE2 degree of rust after 10 years in service). On request, the metal parts can be hot-dip galvanised.


Quality as commitment

Strength reliability and small size are main advantages of the CCV and CC series.

Capacitor voltage transformers and the coupling capacitors are in accordance with the latest specifications for lightning, switching impulse tests, and internal partial discharges level. Sturdy construction offers good resistance.

1. Oil level indicator (optional)
2. Expansion device
3. Capacitor units
4. Insulating oil
5. Porcelain insulator
6. Seal
7. Electromagnetic unit
8. Low voltage terminals box / HF terminal
9. Series inductance
10. Medium voltage transformer
11. Damping circuit against ferroresonance effects

The coupling capacitor only includes items 1 to 6. It is mounted on a steel base. HF terminal is located under the base.

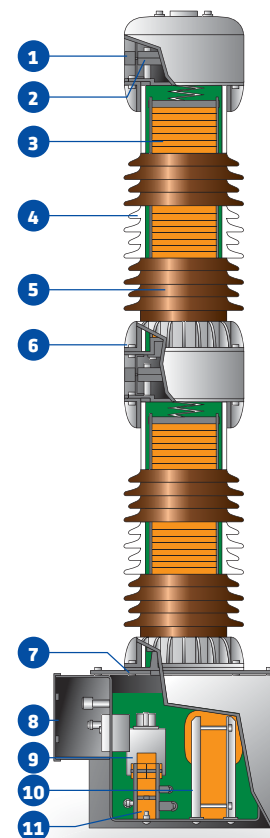

Inquiry check list

1. Applicable standards
 2. Rated frequency
 3. Highest system voltage
 4. Power-frequency withstand test voltage
 5. Lightning impulse test voltage
 6. Switching impulse test voltage, if applicable
 7. Rated capacitance Cn in pF
 8. Overvoltage factor (ex. 1.5 Un 30 s)
 9. Voltage ratio
 10. Number of secondaries
 11. Accuracy class and rated burden for each secondary winding
 12. Thermal burden rating in VA
 13. Environmental conditions (altitude, temperature, site pollution, seismic conditions...)
 14. Required leakage path in mm or in mm/kV
 15. Options as required:
 - HV terminal (material and dimensions)
 - Carrier accessories (1 voltage limiter, 1 HF disconnecting switch, 1 draining coil)
 - 1 anti-condensation heater.
 Please specify auxiliary supply voltage: 110, 115 or 220 V
 - Silicon rubber insulator (light gray)
- For the CC type, specify items 1 to 8, 13 and 14. If a line trap is to be mounted on the CCV or CC, please specify the weight and overall dimensions.**



Electrical characteristics

Characteristic	Unit	IEC	72.5	100	123	145	170	245	300	362	420	525	765
Highest system voltage	(kV)	IEC	140	185	230	275	325	460	460	510	630	680	880
Rated 1 min. 50 Hz. withstand voltage	(kV)	IEC	325	450	550	650	750	1050	1050	1175	1425	1550	2100
Rated lightning impulse withstand voltage (1,2/50 ms)	(kV)	IEC	-	-	-	-	-	850	950	1050	1175	1550	1550
Rated switching impulse withstand voltage	(kV)	IEC	60/03	90/03	110/03	132/03	150/03	220/03	275/03	330/03	400/03	500/03	735/03

Capacitance pF Cn


Insulator model	14000	11000	8800	7200 4400	6200	4400	3600	3200	2400	2000	-
Insulator model 12											
Insulator model 15	20000	15000	12000	10500 8800	8800	6000	5300	4400	3500 4400	3000	-
Insulator model 20	-	-	20000	17000	15000	10000 8800	8500	7200	6800	5000	4000

Capacitance are preferred values or current practice. Other rating available on request.

Accuracy classes and rated burdens

Tank	on 50 Hz 1.5 Un basis		60 Hz only	
	IEC 0.2	IEC 0.5	ANSI 0.3	ANSI 0.6
A	125	300	Z	ZZ
B	250	800	ZZ	2 X ZZ
Z	50	150	Y	Z

Only for information.

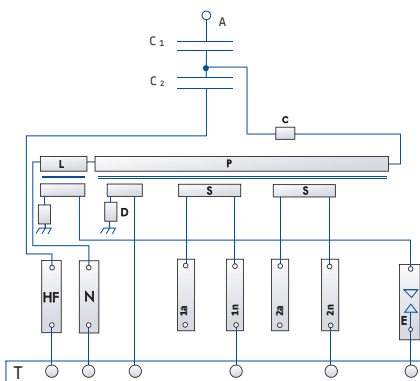

Electrical circuit

- C. Carrier blocking device
- L. Inductance coil
- E. Voltage limiter device
- P. Transformer primary winding
- S. Transformer secondary winding
- D. Damping device
- HF. Low voltage terminal of the capacity divider
- T. Ground terminal

On request:

- GS HF. HF grounding switch
- GS MT. MV grounding switch
- DC. Draining coil
- G. Spare gap
- F. Fuse
- MCB. Micro circuit breaker

Available versions

Dimensions CCV (mm, kg)					
Type	insulator	Tank	A	L1	T. Weight
CCV 72.5	12	Z	1440	-	225
	15	A	1480	-	290
	15	B	1540	-	370
	20	B	-	-	-
CCV 100/123	12	Z	1840	-	250
	15	A	1880	-	330
	15	B	1940	-	400
CCV 145	12	Z	1990	-	265
	15	A	2030	-	340
	15	B	2090	-	410
	20	B	2520	-	580
CCV 170	12	Z	2190	-	280
	15	A	2230	-	360
	15	B	2290	-	430
CCV 245	12	Z	2770	-	320
	15	A	2870	-	410
	15	B	2930	-	480
CCV 245	20	B	3100	-	660
	12	Z	3225	1440	360
	15	A	3265	1440	450
	15	B	3325	1440	520
CCV 300	20	B	-	-	-
	12	Z	3540	1590	385
	15	A	3565	1600	480
	15	B	3625	1600	550
CCV 362	20	B	4465	2010	890
	12	Z	3940	1790	420
	15	A	3965	1800	510
CCV 420	15	B	4025	1800	580
	20	B	4465	2010	890
	12	Z	4520	2370	460
	15	A	4405	2430	540
CCV 525	15	B	4465	2430	620
	20	B	4465	2010	890
	12	Z	4520	2370	460
CCV 550	15	A	4605	2430	560
	15	B	4665	2430	640
	20	B	5030	2570	970
CCV 800	12	Z	5130	2370	510
	15	A	5245	2430	620
	15	B	8310	2430	700
CCV 800	20	B	5590	2570	1060
	20	B	6900	4435*	1280
	20	B	7400	4935*	1450


Dimensions according to model (for all types)			
Tank	B	C	D
A	555	620	450
B	610	675	500
Z	455	565	400
Insulator	12	15	20
Ø ext. (max)	350	400	450

*Note : column in 3 units : L1 corresponds to the height of the 2 top units.

Dimensions CC (mm, kg)			
Type	A	L1	T. Weight
CC 72.5	1325	-	120
CC 100/123	1725	-	150
CC 145	1875	-	160
CC 170	2075	-	180
CC 245	2715	-	230
CC 245	3110	1440	260
CC 300	3410	1600	280
CC 362	3810	1800	320
CC 420	4250	2430	380
CC 525	4450	2430	400
CC 550	5095	2430	440

Fixing dimensions			
	B	C	D
	540	550	500

Indicatives values only - All indicated dimensions must be confirmed with order.

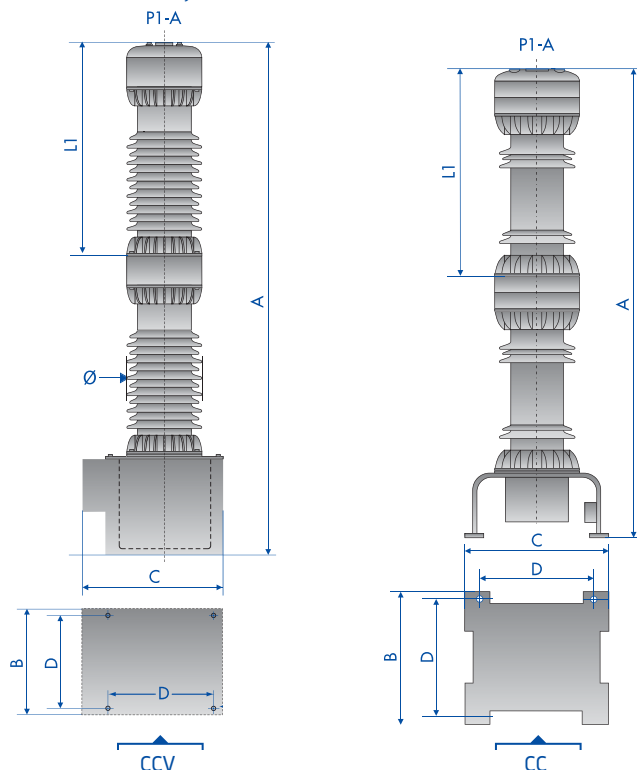

Alstom Grid Worldwide Contact Centre
www.grid.alstom.com/contactcentre
 Tel.: +44 (0) 1785 250 070
www.grid.alstom.com

GRID

ALSTOM

Grid-ITR-L3-CCV_IEC-70668-2011_03-EN © - Alstom, the Alstom logo and any alternative version thereof are trademarks and service marks of Alstom. The other names mentioned, registered or not, are the property of their respective companies. The technical and other data contained in this document are provided for information only. Neither Alstom, its officers nor employees accept responsibility for or should be taken as making any representation or warranty (whether express or implied) as to the accuracy or completeness of such data or the achievements of any projected performance criteria where these are indicated. No liability is accepted for any reliance placed upon the information contained in this brochure. Alstom reserves the right to revise or change these data at any time without further notice. Printed on paper made with pure ECF (Elemental Chlorine Free) ecological cellulose produced from trees grown in production forests under responsible management, and selected recycled three-layer fibres.